

Rec'd PCTO 26 SEP 2005

10/550 979

REC'D 16 APR 2004	
WIPO	PCT

PCT/SG2004/000073

**REGISTRY OF PATENTS  
SINGAPORE**

This is to certify that the annexed is a true copy of following application as filed with the Registry.

Date of Filing : 02 APR 2003


Application Number : 200301765-4

Applicant(s) /  
Proprietor(s) of Patent : JETSIS INTERNATIONAL PTE LTD

Title of Invention : SWITCHING FLUID FLOW BY DIVERSION

  
Chig Kam Tack  
Senior Assistant Registrar  
for REGISTRAR OF PATENTS  
SINGAPORE

05 Apr 2004

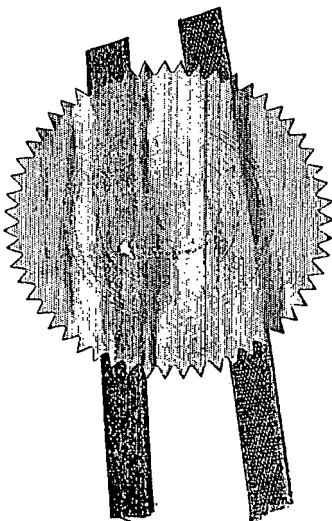

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)



PCT/SG 2004/000073

\*G00001\*

## PATENTS FORM 1

Patents Act  
(Cap. 221)  
Patents Rules  
Rule 19

## INTELLECTUAL PROPERTY OFFICE OF SINGAPORE

REQUEST FOR THE GRANT OF A PATENT UNDER  
SECTION 25

101101

\* denotes mandatory fields

## 1. YOUR REFERENCE\*

ML/LWC/muha/PAT/8112890/SG

2. TITLE OF  
INVENTION\*

SWITCHING FLUID FLOW BY DIVERSION

## 3. DETAILS OF APPLICANT(S)\* (see note 3)

Number of applicant(s)

01

(A) Name

JETSIS INTERNATIONAL PTE LTD

Address

17 HWA YEW INDUSTRIAL BUILDING,  
MANDAI ESTATE #06-1B,  
SINGAPORE 729934

State

Country

SG



For corporate applicant



For individual applicant

State of incorporation

State of residency

Country of incorporation

SG

Country of residency



For others (please specify in the box provided below)

(B) Name

Address

State

Country



☐ For corporate applicant  
State of incorporation   
Country of incorporation   
☐ For individual applicant  
State of residency   
Country of residency   
☐ For others (please specify in the box provided below)

(C) Name   
Address   
State  Country   
☐ For corporate applicant  
State of incorporation   
Country of incorporation   
☐ For individual applicant  
State of residency   
Country of residency   
☐ For others (please specify in the box provided below)

☐ Further applicants are to be indicated on continuation sheet 1

4. DECLARATION OF PRIORITY (see note 5)

A. Country/country designated  DD MM YYYY  
File number  Filing Date   
B. Country/country designated  DD MM YYYY  
File number  Filing Date

☐ Further details are to be indicated on continuation sheet 6

5. INVENTOR(S)\* (see note 6)

A. The applicant(s) is/are the sole/joint inventor(s) Yes ☐ No ☒

B A statement on Patents Form 8 is/will be furnished

Yes

☒

No

☐

6. CLAIMING AN EARLIER FILING DATE UNDER (see note 7)

☐ section 20(3)

☐ section 26(6)

☐ section 47(4)

Patent application number

DD MM YYYY

Filing Date

Please mark with a cross in the relevant checkbox provided below  
(Note: Only one checkbox may be crossed)

☐ Proceedings under rule 27(1)(a)

DD MM YYYY

Date on which the earlier application was amended

☐ Proceedings under rule 27(1)(b)

7. SECTION 14(4)(C) REQUIREMENTS (see note 8)

Invention has been displayed at an international exhibition

Yes

☐

No

☒

8. SECTION 114 REQUIREMENTS (see note 9)

The invention relates to and/or used a micro-organism deposited for the purposes of disclosure in accordance with section 114 with a depository authority under the Budapest Treaty

Yes

☐

No

☒

9. CHECKLIST\*

(A) The application consists of the following number of sheets

i.	Request	<input type="text" value="5"/>	Sheets
ii.	Description	<input type="text" value="17"/>	Sheets
iii.	Claim(s)	<input type="text" value="6"/>	Sheets
iv.	Drawing(s)	<input type="text" value="2"/>	Sheets
v.	Abstract (Note: The figure of the drawing, if any, should accompany the abstract)	<input type="text" value="1"/>	Sheets
	Total number of sheets	<input type="text" value="31"/>	Sheets

(B) The application as filed is accompanied by:

☐

Priority document(s)

☐

Translation of priority document(s)

☒

Statement of inventorship  
& right to grant

☐

International exhibition certificate

10. DETAILS OF AGENT (see notes 10, 11 and 12)

Name

Firm

DREW & NAPIER LLC  
20 RAFFLES PLACE #17-00  
OCEAN TOWERS  
SINGAPORE 048620

11. ADDRESS FOR SERVICE IN SINGAPORE\* (see note 10)

Block/Hse No

Level No.

Unit No /PO Box

152

Street Name

ROBINSON ROAD

Building Name


Postal Code

900302

12. NAME, SIGNATURE AND DECLARATION (WHERE APPROPRIATE) OF APPLICANT OR AGENT\* (see note 12)  
(Note: Please cross the box below where appropriate)

☒

I, the undersigned, do hereby declare that I have been duly authorised to act as representative, for the purposes of this application, on behalf of the applicant(s) named in paragraph 3 herein

  
Name and Signature  
(DREW & NAPIER LLC)

DD MM YYYY

01/04/2003

**NOTES:**

- 1 This form when completed, should be brought or sent to the Registry of Patents together with the rest of the application. Please note that the filing fee should be furnished within the period prescribed.
- 2 The relevant checkboxes as indicated in bold should be marked with a cross where applicable
- 3 Enter the name and address of each applicant in the spaces provided in paragraph 3
  - Where the applicant is an individual
    - Names of individuals should be indicated in full and the surname or family name should be underlined
    - The address of each individual should also be furnished in the space provided
    - The checkbox for "For individual applicant" should be marked with a cross
  - Where the applicant is a body corporate
    - Bodies corporate should be designated by their corporate name and country of incorporation and, where appropriate, the state of incorporation within that country should be entered where provided
    - The address of the body corporate should also be furnished in the space provided
    - The checkbox for "For corporate applicant" should be marked with a cross
  - Where the applicant is a partnership
    - The details of all partners must be provided. The name of each partner should be indicated in full and the surname or family name should be underlined.
    - The address of each partner should also be furnished in the space provided
    - The checkbox for "For others" should be marked with a cross and the name and address of the partnership should be indicated in the box provided
- 4 In the field for "Country", please refer to the standard list of country codes made available by the Registry of Patents and enter the country code corresponding to the country in question
- 5 The declaration of priority in paragraph 4 should state the date of the previous filing, the country in which it was made, and indicate the file number, if available. Where the application relied upon in an International Application or a regional patent application e.g. European patent application, one of the countries designated in that application (being one falling under section 17 of the Patents Act) should be identified and the country should be entered in the space provided.
- 6 Where the applicant or applicants is/are the sole inventor or the joint inventors, paragraph 6 should be completed by marking with a cross the "YES" checkbox in the declaration (A) and the "NO" checkbox in the alternative statement (B). Where this is not the case, the "NO" checkbox in declaration (A) should be marked with a cross and a statement will be required to be filed on Patents Form 8
- 7 When an application is made by virtue of section 20(3), 28(6) or 47(4), the appropriate section should be identified in paragraph 8 and the number of the earlier application or any patent granted thereon identified. Applicants proceeding under section 28(6) should identify which provision in rule 27 they are proceeding under. If the applicants are proceeding under rule 27(1)(a), they should also indicate the date on which the earlier application was amended
- 8 Where the applicant wishes an earlier disclosure of the invention by him at an International Exhibition to be disregarded in accordance with section 14(4)(c), then the "YES" checkbox at paragraph 7 should be marked with a cross. Otherwise, the "NO" checkbox should be marked with a cross.
- 9 Where in disclosing the invention the application refers to one or more micro-organisms deposited with a depository authority under the Budapest Treaty, then the "YES" checkbox at paragraph 8 should be marked with a cross. Otherwise, the "NO" checkbox should be marked with a cross. Attention is also drawn to the Fourth Schedule of the Patents Rules
- 10 Where an agent is appointed, the fields for "DETAILS OF AGENT" and "ADDRESS FOR SERVICE IN SINGAPORE" should be completed and they should be the same as those found in the corresponding Patents Form 41. In the event where no agent is appointed, the field for "ADDRESS FOR SERVICE IN SINGAPORE" should be completed, leaving the field for "DETAILS OF AGENT" blank.
- 11 In the event where an individual is appointed as an agent, the sub-field "Name" under "DETAILS OF AGENT" must be completed by entering the full name of the individual. The sub-field "Firm" may be left blank. In the event where a partnership/body corporate is appointed as an agent, the sub-field "Firm" under "DETAILS OF AGENT" must be completed by entering the name of the partnership/body corporate. The sub-field "Name" may be left blank.
- 12 Attention is drawn to sections 104 and 105 of the Patents Act, rules 90 and 105 of the Patents Rules, and the Patents (Patent Agents) Rules 2001.
- 13 Applicants resident in Singapore are reminded that if the Registry of Patents considers that an application contains information the publication of which might be prejudicial to the defence of Singapore or the safety of the public, it may prohibit or restrict its publication or communication. Any person resident in Singapore and wishing to apply for patent protection in other countries must first obtain permission from the Singapore Registry of Patents unless they have already applied for a patent for the same invention in Singapore. In the latter case, no application should be made overseas until at least 2 months after the application has been filed in Singapore, and unless no directions had been issued under section 33 by the Registrar or such directions have been revoked. Attention is drawn to sections 33 and 34 of the Patents Act.
- 14 If the space provided in the patents form is not enough, the additional information should be entered in the relevant continuation sheet. Please note that the continuation sheets need not be filed with the Registry of Patents if they are not used



\*150150\*



\*G00002\*

## **SWITCHING FLUID FLOW BY DIVERSION**

### **FIELD OF INVENTION**

5

The present invention relates to arrangements and methods for the control of a fluid flow. More particularly, but not exclusively, it relates to the switching, or start/stop control, of a flow of a pressurised carrier fluid in which abrasive particles are suspended. One application of the invention is in the control of an abrasive cutting jet formed by suspending abrasive  
10 particles in a fluid, such as water, which is then applied at high pressure to a nozzle to form the cutting jet.

### **BACKGROUND**

15 The invention has application to the control of fluid flow and particularly the control of fluids containing abrasive material which can cause blockages and undesirable wear and erosion of control valve parts.

The use of abrasive materials in a fluid jet is well known, for example for machining  
20 operations such as cutting, drilling and surface finishing. In one known arrangement, a high pressure carrier fluid, for example water, is pumped into a vessel containing a slurry of abrasive particles to force a mixture of the carrier fluid and abrasive particles through a nozzle which forms a well-defined abrasive jet.

25 Various applications require the jet, or at least the abrasive content in the jet, to be repeatedly switched on and off. For example, in the sequential drilling of multiple holes the jet, or at least the abrasive content in the jet, is switched off during repositioning of the nozzle over the work piece and then switched on again to drill the next hole.

It is not practical to achieve this by simply repeatedly switching the high pressure pump on and off. The time taken for the alternating depressurisation and repressurisation of the abrasive slurry vessel delays the cessation and re-establishment of the abrasive flow at the jet and limits the jet switching frequency.

5

Also, when the fluid flow is halted the abrasive particles, which are suspended in the moving flow, can settle and cause blockages, for example in the flow conduits and nozzle. These blockages prevent the easy re-establishment of the abrasive fluid flow and can cause excessive down time while parts are de-pressurised, disassembled, flushed to clear the blockages, re-assembled and re-pressurised. When the outlet nozzle is blocked, the pressure vessel through which the flow is passed to entrain the abrasive particles must be depressurised through an alternative route, usually a valve connected to the pressure vessel. This valve is subject to a high degree of wear because it is exposed to the full pressure differential across its seat as it opens and because small fines of abrasive from the vessel can pass through the valve.

15

Furthermore, the use of valves to control the abrasive flow is difficult due to the abrasive nature of the fluid which causes excessive valve wear. Present valves are not entirely suitable for opening and closing against a high-pressure abrasive flow, or for maintaining a pressure differential across the valve during the opening and closing operations.

20

One prior art two way wiping action valve operates with slurries at low pressures for turning a 'mostly' abrasive-free water jet on and off. This type of valve is self-lapping so that as it wears it continues to maintain a seal. However, when controlling high pressure abrasive flows, the valve will quickly become damaged as it nears closing because the high pressure abrasive slurry discharging through the reducing gap will erode the valve.

25



This latter problem is addressed in the prior art WO 99/14015 and WO 02/087827 which describe the use of small diameter flow outlets to cope with the large pressure differentials, and a controlled jet pump to ensure the flow is relatively abrasive free before actuating the valve. This valve design relies on halting the abrasive flow then shutting the jet, and flow,  
5 off completely. For abrasive suspension jets pressurised by piston pumps, stopping and starting the flow is a problem, as is the resultant clogging of the abrasive material in the conduits or hoses if the flow is halted. Furthermore, the small diameter valve outlets make this arrangement unsuitable for larger flow requirements.

## 10 SUMMARY OF INVENTION

It is an object of one embodiment of the invention to provide a fluid flow control arrangement which reduces at least some of the problems associated with the prior art.

15 It is an object of a second embodiment of the invention to provide a method of controlling the flow of a fluid which method reduces at least some of the problems associated with the prior art.

In broad terms a first aspect of the invention may be said to be a method of controlling a fluid  
20 flow by a three way valve having;

- (a) an inlet port,
- (b) first and second outlet ports,
- (c) a first configuration in which the valve substantially provides a path for fluid flow between the inlet port and the first outlet port but not between the inlet port and the  
25 second outlet port,
- (d) a second intermediate configuration in which the valve provides respective paths for fluid flow between the inlet port and each of the first and second outlet ports; and

(e) a third configuration in which the valve substantially provides a path for fluid flow between the inlet port and the second outlet port but not between the inlet port and the first outlet port,

the method including the following steps performed sequentially in the order (f) to (l);

- 5 (f) connecting the inlet port of the three way valve to a source of primary fluid at a first pressure and configuring the three way valve in the first configuration to permit the primary fluid to flow into the inlet port, through the three way valve and out from the first outlet port,
- (g) connecting a supply of auxiliary fluid at a second pressure to the second outlet port,
- 10 (h) configuring the three way valve in the second intermediate configuration,
- (i) discontinuing said supply of auxiliary fluid connected to said second outlet port and connecting a supply of auxiliary fluid at a third pressure to the first outlet port,
- (j) permitting the primary fluid to flow into the inlet port, through the three way valve and out from the second outlet port,
- 15 (k) preventing the flow of primary fluid out from the first outlet port by configuring the three way valve in the third configuration, and
- (l) discontinuing said supply of auxiliary fluid connected to said first outlet port,

wherein the second and third pressures are higher than the first pressure, and the primary fluid flow into the inlet port, through the three way valve and out from at least one of the outlet ports is substantially continuously maintained during performance of the above-mentioned steps.

In a second aspect, the invention may be broadly said to be a method of diverting a flow of primary fluid flowing into an inlet port of a three way valve and initially discharging from a first outlet port of the three way valve to divert and discharge from a second outlet port of the three way valve while maintaining a continuous flow of said primary fluid into the inlet port, the method including the following steps performed sequentially in the order (a) to (f);

- (a) connecting the inlet port of the three way valve to a source of the primary fluid at a first pressure and configuring the three way valve by opening the first outlet port and closing the second outlet port to permit the primary fluid to flow into the inlet port, through the three way valve and out from the first outlet port,
- 5 (b) connecting a supply of auxiliary fluid at a second pressure to the second outlet port,
- (c) configuring the three way valve by opening both outlet ports to permit the primary fluid flowing into the inlet port to flow out of either outlet port,
- (d) discontinuing said supply of auxiliary fluid connected to said second outlet port and connecting a supply of auxiliary fluid at a third pressure to the first outlet port thereby
- 10 diverting the flow of primary fluid initially flowing into the inlet port, through the three way valve and out from the first outlet port to instead flow out from the second outlet port,
- (e) preventing further flow of primary fluid out from the first outlet port by closing the first outlet port,
- 15 (f) discontinuing said supply of auxiliary fluid connected to said first outlet port,

wherein the second and third pressures are higher than the first pressure, and the primary fluid flow into the inlet port, through the three way valve and out from at least one of the outlet ports is substantially continuously maintained during performance of the above-mentioned steps.

20

In a third aspect, the invention may be broadly said to be a valve arrangement for controlling the flow of a fluid, the valve arrangement including:

a three way valve (1) having;

- (a) an inlet port (2) being connectable to a source of primary fluid at a first pressure,
- 25 (b) first and second outlet ports (4, 7),
- (c) a first configuration in which the valve substantially provides a path for fluid flow between the inlet port (2) and the first outlet port (4) but not between the inlet port and the second outlet port (7),

- (d) a second intermediate configuration in which the valve provides respective paths for fluid flow between the inlet port and each of the first and second outlet ports; and
- (e) a third configuration in which the valve substantially provides a path for fluid flow between the inlet port and the second outlet port but not between the inlet port and the first outlet port,

the valve arrangement also including:

- (f) a first fluid flow conduit (17) connected to the first outlet port, the first conduit having a first auxiliary valve (18) for controlling the flow of an auxiliary fluid at a second pressure to the first outlet port (4),
- (g) a second fluid flow conduit (19) connected to the second outlet port, the second conduit having a second auxiliary valve (20) for controlling the flow of an auxiliary fluid at a third pressure to the second outlet port (7), and
- (h) a valve controller which controls the three way valve and the first and second auxiliary valves,

the valve controller being adapted to:

- (i) sequentially change the three way valve from the first configuration to the second intermediate configuration and then to the third configuration,
- (j) maintain the first auxiliary valve closed and the second auxiliary valve open at least immediately prior to and during the change of the configuration of the three way valve from the first to the second configurations,
- (k) open the first auxiliary valve and close the second auxiliary valve when the valve is in the second intermediate configuration,
- (l) maintain the second auxiliary valve closed and the first auxiliary valve open during the change of the configuration of the three way valve from the second intermediate configuration to the third configuration; and
- (m) close both first and second auxiliary valves after the three way valve has been changed to the third configuration.

The first, second and third aspects of the invention may include the following options.

The primary fluid may include an abrasive material entrained in a carrier fluid.

5 The primary fluid may include abrasive particles entrained in a carrier liquid.

The carrier liquid may be water.

The auxiliary fluids may be water.

10

A nozzle may be connected to one of the outlet ports for forming the primary fluid flowing therefrom into a jet.

15 Optionally, the primary fluid includes abrasive particles entrained in a carrier liquid and the nozzle is for forming an abrasive jet.

A second nozzle may be connected to the other of said outlet ports.

The three way valve may be a rotary valve.

20

The rotary valve may utilise a rotary wiping action with a self-lapping flat valve seat.

25 The invention may further be said to consist in any alternative combination of parts or features mentioned herein or shown in the accompanying drawings. Known equivalents of these parts or features which are not expressly set out are nevertheless deemed to be included.

## BRIEF DESCRIPTION OF DRAWINGS

A preferred embodiment and methods of the invention will be further described with reference to the accompanying figures by way of example only and without intending to be limiting, wherein;

Figure 1 shows a portion of an abrasive cutting jet apparatus including a rotary valve,

Figure 2 shows an axial plan view of a valve plate and seat of the rotary valve of Figure 1, in one configuration,

Figure 3 shows an axial plan view of the valve plate and seat of the rotary valve of Figures 1 and 2, in an alternative configuration,

Figure 4 shows a schematic layout of parts of the abrasive cutting jet apparatus in one mode, and

Figure 5 shows a schematic layout of parts of the abrasive cutting jet apparatus in an alternative mode.

## DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

Referring to the figures it will be appreciated that the invention may be implemented in various forms and modes. The following description of an embodiment and methods are given by way of example only.

Figure 1 shows an arrangement of valves for controlling the flow of an abrasive fluid to a cutting nozzle in an abrasive cutting jet apparatus. The arrangement includes a three way rotary valve 1 having an inlet port 2 which is to be connected via an inlet conduit 3 to a source (not shown) of primary fluid at a high pressure. The primary fluid may be a liquid or gas, but in one preferred application is typically water in which abrasive particles are entrained.

The three way valve 1 also has a cutting flow outlet port 4 which connects via a cutting flow conduit 5 to a cutting nozzle 6, and a bypass flow outlet port 7 which connects via an bypass flow conduit 8 to a bypass nozzle 9. The three way valve has control shaft 10 and rotor by which a valve seat 11 is rotated. The valve seat is biased by a spring 12 toward a valve plate 13 which is provided with three apertures which correspond to the three valve ports: a central inlet port aperture 14 and, radially outward from the central aperture, two circumferentially spaced outlet port apertures being a cutting flow outlet aperture 15 and a bypass flow outlet aperture 16.

10 The control shaft 10 and rotor of the three way valve can be rotated to move the valve seat 11 over the apertured valve plate 13 between two configurations, as may be best appreciated by the axial plan views shown in Figures 2 and 3.

15 The three way valve is a high pressure rotary valve using a wiping action with self-lapping flat valve seats. Although in general such a valve can only operate with a small pressure differential across its faces, this problem has been overcome by momentarily providing a backpressure to a valve outlet just as that outlet is being opened, as will be discussed further below.

20 Figures 1, 2 and 4 show the apparatus with the three way valve 1 in a cutting configuration in which the valve seat 11 occludes the bypass flow outlet aperture 16, while providing a path for the primary fluid to flow between the inlet port 2 and the cutting flow outlet port 4, which leads to the cutting nozzle 6.

25 Figures 3 and 5 show the apparatus with the three way valve 1 in a bypass configuration in which the valve seat 11 occludes the cutting flow outlet aperture 15, while providing a path for the primary fluid to flow between the inlet port 2 and the bypass flow outlet port 7.

When changing between the cutting and bypass configurations discussed above, the three way valve passes through an intermediate or changeover configuration (not shown). In the intermediate configuration, both of the outlet port apertures 15, 16 are open to provide respective paths for primary fluid to flow between the inlet port 2 and each of the outlet ports 4, 7; i.e. the outlet ports leading to both the cutting nozzle 6 and the bypass nozzle 9.

As may be best appreciated from Figure 1, a source (not shown) of high pressure auxiliary fluid, which in the preferred application is clean water, is connected to the cutting flow conduit 5 via a pressurisation conduit 17. The cutting flow pressurisation conduit 17 includes a pressurisation control valve 18. A source of high pressure auxiliary fluid (not shown), which in the preferred application is clean water and is typically the same clean water supply connected via pressurisation conduit 17, is connected to the bypass flow conduit 8 via a pressurisation conduit 19. The bypass flow pressurisation conduit 19 includes a pressurisation control valve 20.

As will be explained further below, the flow of the primary fluid from the cutting nozzle may be stopped by diverting the primary fluid flow to discharge instead from the bypass nozzle. Similarly, the flow from the cutting nozzle may be re-established by re-diverting the flow back to the cutting nozzle. This switching of the flow of primary fluid from the cutting nozzle may be accomplished without halting the flow of primary fluid through the apparatus.

The switching of the flow of fluid from the cutting nozzle is controlled by a controller (not shown) which sequentially changes the states of the three way valve 1 and the two pressurisation valves 18, 20 to divert the flow of primary fluid back and forth between the cutting and bypass nozzles.

The sequence of valve operation will be further explained by reference to Figures 4 and 5 which show the abrasive jet cutting apparatus arranged over a catch tank 21. An abrasive-



laden slurry is discharged as a defined jet (not shown) from the cutting nozzle 6 and directed at a workpiece (not shown) to perform a cutting or drilling operation, after which the spent slurry is collected in the catch tank. The bypass nozzle 9 is placed in the catch tank so that when the abrasive liquid flow is diverted from the cutting jet to discharge from the bypass nozzle, the discharged bypass liquid combines with the spent cutting liquid in the catch tank from where it can be re-cycled.

In the arrangement shown in Figure 4, a flow of high pressure water, in which abrasive particles are entrained, is fed via inlet conduit 3 to the inlet port 2 of the three way valve 1. The pressurisation conduits 17, 19 both connect to a high pressure source of clean water. The pressurisation valves 18, 20 (in respective pressurisation conduits 17, 19) are both closed.

As shown in Figures 2 and 4, the valve seat 11 of the three way valve 1 occludes the bypass flow outlet port 7 so that no abrasive-laden water flows to the bypass nozzle 6. The presence within the three way valve of the high pressure abrasive-laden water and the absence of any significant pressure in the bypass flow conduit 8 provides a pressure differential which augments the sealing of the valve seat 11 over the valve plate aperture 16 at the bypass flow outlet port 7. The abrasive-laden water flows through the three way valve, via open cutting flow outlet port 4 and the cutting flow conduit 5, to discharge as an abrasive jet from the cutting nozzle 6. There is no discharge from the bypass nozzle.

When the cutting jet is to be stopped, bypass flow pressurisation valve 20 is opened to pressurise bypass flow pressurisation conduit 19 with clean water which then discharges from bypass nozzle and applies back pressure to the bypass flow outlet port 7 of the three way valve, reducing the aforementioned pressure differential. This reduction in pressure differential allows the valve seat to be easily moved. Without this back pressure, operation of the three way valve would be difficult, if not impossible, and if possible would require a very large force and would be likely to cause excessive valve wear.

The pressure of the clean auxiliary water supply is slightly higher than that of the abrasive-laden liquid supplied via the inlet conduit 3 to the three way valve. In one arrangement (not shown), this clean auxiliary water and the carrier water for the abrasive-laden water are initially derived from the same high pressure water supply, but the pressure of the clean auxiliary water is slightly higher than that of the abrasive-laden water at the inlet port of the three way valve. The less-direct passage that the carrier water must take, e.g. through a slurry vessel for the entrainment of abrasive particles in the carrier water, reduces the pressure of this flow before it reaches the inlet of the three way valve.

10

The seat 11 of the rotary three way valve is then moved to an intermediate position (not shown) between the outlet ports, in which position both the bypass flow outlet port 7 and the cutting flow outlet port 4 are open.

15 As the bypass flow outlet port 7 of the three way valve 1 opens, the slightly higher pressure of the clean auxiliary water applied to the bypass flow conduit 8 via pressurisation conduit 19 causes a small back flow of the clean water to flow into the bypass flow outlet port 7 to join with the abrasive-laden water flowing out from the cutting flow outlet port 4. This back flow allows the bypass flow outlet port 7 to open in the absence of any significant abrasive flow therethrough, while at the same time maintaining the flow of the abrasive-laden water  
20 through the already-open cutting flow outlet port 4 to discharge as the jet at the cutting nozzle 6.

When the seat 11 of the three way valve 1 is at the intermediate position (i.e. both the cutting and bypass flow outlet ports 4, 7 are open), the pressurisation valve 20 is changed from open  
25 to closed and the pressurisation valve 18 is changed from closed to opened.

The higher pressure of the clean auxiliary water now applied to the cutting flow conduit 5 via pressurisation conduit 17 causes clean water to discharge via the cutting nozzle 6 and a small back flow of the clean water to flow into the cutting flow outlet port 4. The switching of the pressurised clean water from the bypass flow conduit 8 to the cutting flow conduit 5, in effect, switches the backflow of clean water at the three way valve from the bypass flow outlet port 7 to the cutting flow outlet port 4. This switch of the backflows hydraulically shifts the flow of abrasive-laden water, previously exiting the three way valve at the cutting flow outlet port 4, to divert to exit at the bypass flow outlet port 7 and to discharge into the catch tank 21 via the bypass nozzle 9.

The backflow of clean auxiliary water into the cutting flow outlet port 4 joins with the abrasive-laden water flowing from the bypass flow outlet port 7. This back flow also allows the cutting flow outlet port 4 to close (as will be explained further below) in the absence of any significant abrasive flow, while maintaining the flow of the abrasive-laden water through the already-open bypass flow outlet port 7 to discharge into the catch tank 21 at the bypass nozzle 9.

It will be appreciated that the diversion of the abrasive-laden water flow is accomplished hydraulically by the selective application of back flows of clean auxiliary water at a slightly higher pressure than that of the primary abrasive-laden water flow. The changeover of the abrasive flow is accomplished while both of the outlet ports of the three way valve are open, largely avoiding the significant erosion or wear that would otherwise occur if any valve part had to close or open on a high pressure abrasive flow.

The application to the outlet ports of the three way valve of the back pressure provided by the auxiliary water during the times that the three way valve is to be operated also reduces the large pressure differentials which would otherwise preclude easy operation of the rotary valve.

It is also to be understood that control of the pressurisation valves effectively switches the abrasive fluid flow in the three way valve. This switching of the abrasive flow is achieved hydraulically by switching the application of the pressurized auxiliary flow between the cutting and bypass outlet flow conduits. The pressurisation valves open and close on the clean auxiliary water only and are therefore not subject to the abrasive primary flow, nor to any wear or erosion caused by that flow.

References herein to open valve ports or open valve apertures are to be understood, except where not appropriate, as including ports or apertures that are not fully closed, i.e. as including ports or apertures that are partly open, in addition to ports or apertures that are fully open.

To complete the diversion of the abrasive flow, the seat 11 of the three way valve 1 is now rotated from the intermediate position to occlude the cutting flow outlet port 4 as shown in Figures 3 and 5. This prevents any further flow of the abrasive-laden water to the cutting nozzle 9. The abrasive-laden water flows through the three way valve, via open bypass flow outlet port 7 and the bypass flow conduit 8, to discharge from the bypass nozzle 9.

After the valve seat 11 has closed the cutting flow outlet port 4, the pressurisation valve 18 is changed from open to closed to complete the switching off of the jet at the cutting nozzle 6 by diversion of the primary abrasive flow to discharge from the bypass nozzle 9.

To re-establish the cutting jet, the procedure described above is simply reversed. More particularly, the pressurisation valve 18 is opened, the three way valve is changed to the intermediate configuration, pressurisation valve 18 is shut and pressurisation valve 20 is opened, the configuration of the three way valve is changed to occlude the bypass flow outlet port 7, and the pressurisation valve 20 is closed.

When, as is the case in the preferred application, the primary fluid comprises abrasive particles entrained in a liquid, blockages can occur when the particles settle in a stationary or slow moving liquid, for example at the cutting nozzle or in the connecting conduits. The  
5 maintenance of a continuous flow of the abrasive-laden fluid, as described above, reduces the likelihood of such blockages.

If the cutting nozzle 6 becomes blocked, the three way valve 1 can be actuated as described above, to close the cutting flow conduit 5 leading to the cutting nozzle and divert the abrasive  
10 flow to the bypass nozzle 9, before switching off the pump and allowing the system to depressurise naturally through the bypass nozzle.

This has the advantage that the abrasive slurry flow is not stopped completely when the nozzle blocks and the abrasive can be flushed clean from the three way valve 1, inlet conduit  
15 3 and cutting flow conduit 5 before depressurising, whereas traditionally the abrasive lines would need to be unblocked after each blocked nozzle incident.

A pressure sensor may be used to determine when the cutting nozzle is blocked and to automatically actuate the flow diversion process to divert the abrasive flow to the bypass  
20 nozzle before shutting down the pump. The operator then only has to remove the nozzle and unblock and replace it.

It is to be understood that the flow diversion process described herein may be performed quickly, for example in only a few seconds: the first pressurisation valve opening only  
25 momentarily before rotation of the control shaft of the three way valve begins, the changeover of the pressurisation valves occurring while the three way valve rotor is traversing, midway between its two limits, and the final shut-off of the second pressurisation valve occurring immediately after the valve has completed its changeover.

High-speed drilling or piercing operations can be performed with an abrasive jet if the jet can be rapidly switched on and off. In prior art abrasive jet machining systems, the halting of the abrasive flow and depressurisation of the jet through the nozzle must be completed before the  
5 nozzle can be relocated for the next required hole position. This can typically take up to one minute for each relocation. Alternatively, the abrasive could be turned off, leaving a water jet still exiting the nozzle at high pressure. However, this alternative is only suitable for machining soft materials where the high pressure water jet is not likely to cause surface damage as it moves to the next position.

10 By diverting the abrasive flow as described herein, the whole jet exiting the nozzle is rapidly stopped while the pressurisation and flow of the abrasive fluid is maintained. With the current invention diversion of the jet flow, nozzle repositioning and jet flow re-establishment can take less than 3 seconds which allows high speed drilling operations to be carried out  
15 without risk of secondary surface damage.

In a further arrangement (not shown), the abrasive flow is switched between two or more cutting nozzles. Rather than using one cutting and one bypass nozzle as discussed above, two or more cutting nozzles are used. In this case the abrasive flow is switched to a selected  
20 cutting nozzle while the remaining nozzles can be re-positioned ready for the next machining operation.

The foregoing describes the invention including preferred forms thereof. Alterations and modifications as will be obvious to those skilled in the art are intended to be incorporated  
25 within the scope hereof as defined in the accompanying claims.

List of features labelled in the Figures:

- 5    1    Three way rotary valve
- 2    Inlet port
- 3    Inlet conduit
- 4    Cutting flow outlet port
- 5    Cutting flow conduit
- 10   6    Cutting nozzle
- 7    Bypass flow outlet port
- 8    Bypass flow conduit
- 9    Bypass nozzle
- 10    Control shaft
- 15   11    Valve seat
- 12    Valve spring
- 13    Valve plate
- 14    Inlet port aperture
- 15    Cutting flow outlet aperture
- 20   16    Bypass flow outlet aperture
- 17    Cutting flow pressurisation conduit
- 18    Pressurisation control valve
- 19    Bypass flow pressurisation conduit
- 20    Pressurisation control valve
- 25   21    Catch tank
- 22    Spent fluid

## CLAIMS

- 1 A method of controlling a fluid flow by a three way valve (1) having;
- (a) an inlet port (2),
  - 5 (b) first and second outlet ports (4, 7),
  - (c) a first configuration in which the valve substantially provides a path for fluid flow between the inlet port (2) and the first outlet port (4) but not between the inlet port (2) and the second outlet port (7),
  - (d) a second intermediate configuration in which the valve provides respective paths for
  - 10 fluid flow between the inlet port and each of the first and second outlet ports; and
  - (e) a third configuration in which the valve substantially provides a path for fluid flow between the inlet port and the second outlet port but not between the inlet port and the first outlet port,
- the method including the following steps performed sequentially in the order (f) to (l);
- 15 (f) connecting the inlet port of the three way valve to a source of primary fluid at a first pressure and configuring the three way valve in the first configuration to permit the primary fluid to flow into the inlet port, through the three way valve and out from the first outlet port,
  - (g) connecting a supply of auxiliary fluid at a second pressure to the second outlet port,
  - 20 (h) configuring the three way valve in the second intermediate configuration,
  - (i) discontinuing said supply of auxiliary fluid connected to said second outlet port and connecting a supply of auxiliary fluid at a third pressure to the first outlet port,
  - (j) permitting the primary fluid to flow into the inlet port, through the three way valve and out from the second outlet port,
  - 25 (k) preventing the flow of primary fluid out from the first outlet port by configuring the three way valve in the third configuration, and
  - (l) discontinuing said supply of auxiliary fluid connected to said first outlet port,



wherein the second and third pressures are higher than the first pressure, and the primary fluid flow into the inlet port, through the three way valve and out from at least one of the outlet ports is substantially continuously maintained during performance of the above-mentioned steps.

5

2 A method of diverting a flow of primary fluid flowing into an inlet port (2) of a three way valve (1) and initially discharging from a first outlet port (4) of the three way valve to divert and discharge from a second outlet port (7) of the three way valve while maintaining a continuous flow of said primary fluid into the inlet port, the method including the following steps performed sequentially in the order (a) to (f);

10

(a) connecting the inlet port of the three way valve to a source of the primary fluid at a first pressure and configuring the three way valve by opening the first outlet port and closing the second outlet port to permit the primary fluid to flow into the inlet port, through the three way valve and out from the first outlet port,

15

(b) connecting a supply of auxiliary fluid at a second pressure to the second outlet port,

(c) configuring the three way valve by opening both outlet ports to permit the primary fluid flowing into the inlet port to flow out of either outlet port,

(d) discontinuing said supply of auxiliary fluid connected to said second outlet port and connecting a supply of auxiliary fluid at a third pressure to the first outlet port thereby diverting the flow of primary fluid initially flowing into the inlet port, through the three way valve and out from the first outlet port to instead flow out from the second outlet port,

20

(e) preventing further flow of primary fluid out from the first outlet port by closing the first outlet port,

25

(f) discontinuing said supply of auxiliary fluid connected to said first outlet port,

wherein the second and third pressures are higher than the first pressure, and the primary fluid flow into the inlet port, through the three way valve and out from at least one of the

outlet ports is substantially continuously maintained during performance of the above-mentioned steps.

- 3     The method as claimed in claim 1 or 2, wherein the primary fluid includes an abrasive  
5     material entrained in a carrier fluid.
- 4     The method as claimed in claim 1 or 2, wherein the primary fluid includes abrasive  
      particles entrained in a carrier liquid.
- 10    5     The method as claimed in claim 4 wherein the carrier liquid is water.
- 6     The method as claimed in any one of the preceding claims, wherein the auxiliary fluids  
      are water.
- 15    7     The method as claimed in any one of the preceding claims, wherein a nozzle (6) is  
      connected to one of the outlet ports (4) for forming the primary fluid flowing therefrom into a  
      jet.
- 8     The method as claimed in claim 7, wherein the primary fluid includes abrasive particles  
20     entrained in a carrier liquid and the nozzle is for forming an abrasive jet.
- 9     The method as claimed in claim 7 or 8, wherein a second nozzle (9) is connected to the  
      other of said outlet ports (7).
- 25    10    The method as claimed in any one of the preceding claims, wherein the three way valve  
      is a rotary valve.

11 The method as claimed in claim 10, wherein the rotary valve utilises a rotary wiping action with a self-lapping flat valve seat.

12 A valve arrangement for controlling the flow of a fluid, the valve arrangement  
5 including:

a three way valve (1) having;

- (a) an inlet port (2) being connectable to a source of primary fluid at a first pressure,
- (b) first and second outlet ports (4, 7),
- (c) a first configuration in which the valve substantially provides a path for fluid flow  
10 between the inlet port (2) and the first outlet port (4) but not between the inlet port and the second outlet port (7),
- (d) a second intermediate configuration in which the valve provides respective paths for fluid flow between the inlet port and each of the first and second outlet ports; and
- (e) a third configuration in which the valve substantially provides a path for fluid flow  
15 between the inlet port and the second outlet port but not between the inlet port and the first outlet port,

the valve arrangement also including:

- (f) a first fluid flow conduit (17) connected to the first outlet port, the first conduit having  
20 a first auxiliary valve (18) for controlling the flow of an auxiliary fluid at a second pressure to the first outlet port (4),
- (g) a second fluid flow conduit (19) connected to the second outlet port, the second conduit having a second auxiliary valve (20) for controlling the flow of an auxiliary fluid at a third pressure to the second outlet port (7), and
- (h) a valve controller which controls the three way valve and the first and second  
25 auxiliary valves,

the valve controller being adapted to:

- (i) sequentially change the three way valve from the first configuration to the second intermediate configuration and then to the third configuration,

- (j) maintain the first auxiliary valve closed and the second auxiliary valve open at least immediately prior to and during the change of the configuration of the three way valve from the first to the second configurations,
  - 5 (k) open the first auxiliary valve and close the second auxiliary valve when the valve is in the second intermediate configuration,
  - (l) maintain the second auxiliary valve closed and the first auxiliary valve open during the change of the configuration of the three way valve from the second intermediate configuration to the third configuration; and
  - 10 (m) close both first and second auxiliary valves after the three way valve has been changed to the third configuration.
- 13 The valve arrangement as claimed in claim 12, wherein the primary fluid includes an abrasive material entrained in a carrier fluid.
- 15 14 The valve arrangement as claimed in claim 12, wherein the primary fluid includes abrasive particles entrained in a carrier liquid.
- 15 The valve arrangement as claimed in claim 14 wherein the carrier liquid is water.
- 20 16 The valve arrangement as claimed in any one of claims 12 to 15, wherein the auxiliary fluids are water.
- 17 The valve arrangement as claimed in any one of claims 12 to 16, wherein a nozzle (6) is connected to one of the outlet ports (4) for forming the primary fluid flowing therefrom into a  
25 jet.
- 18 The valve arrangement as claimed in claim 17, wherein the primary fluid includes abrasive particles entrained in a carrier liquid and the nozzle is for forming an abrasive jet.

19 The valve arrangement as claimed in claim 17 or 18, wherein a second nozzle (9) is connected to the other of said outlet ports (7).

5 20 The valve arrangement as claimed in any one of claims 12 to 19, wherein the three way valve is a rotary valve.

21 The valve arrangement as claimed in claim 20, wherein the rotary valve utilises a rotary wiping action with a self-lapping flat valve seat.

**SWITCHING FLUID FLOW BY DIVERSION**

**ABSTRACT**

5

A flow of fluid is switched on and off by diverting the flow to an alternative path. In a preferred application an abrasive cutting jet, formed by a flow of abrasive slurry fed via a conduit 5 to a cutting jet nozzle 6, is switched on and off by diverting the flow at a three way changeover valve 1 to a conduit 8 and bypass nozzle 9. Valves 18, 20 control the connection of a flow of clean auxiliary water to respective outlet ports 4, 7 of the changeover valve 1 to reduce pressure differentials during operation of the changeover valve and to provide clean backflows which hydraulically divert the flow of abrasive slurry at the changeover valve and allow the changeover valve to open and close on a clean, largely abrasive-free flow.

15 Figure 1



\*161163\*



\*G00007\*

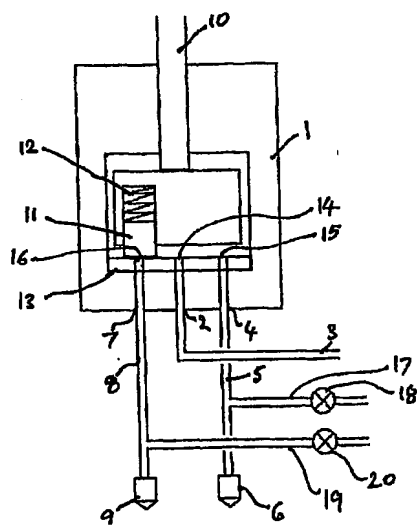


FIGURE 1




FIGURE 2




FIGURE 3

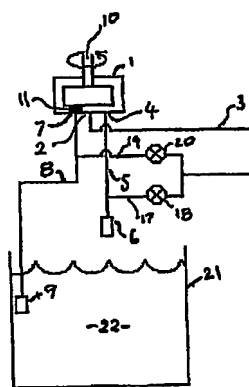


FIGURE 4

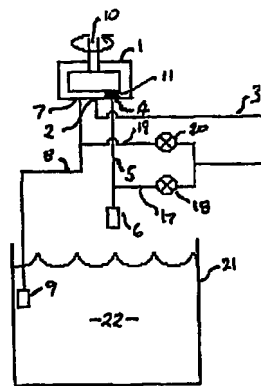


FIGURE 5



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**